DRAWING FOR CUSTOMER



NOTES:

1.HUOSINGT: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
2.ACTUATOR: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
3.TERMINAL:PHOSPHOR BRONZE C5210
PLATING:GOLD FLASH OR MATTE-TIN OR TIN (LEAD FREE)
4.FITTING NAIL:BRASS C5191
PLATING:MATTE-TIN OR TIN (LEAD FREE)

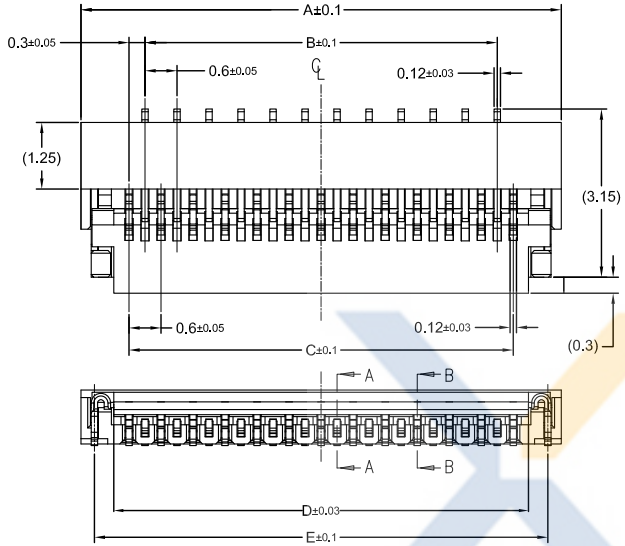





SECTION A-A





SECTION B-B

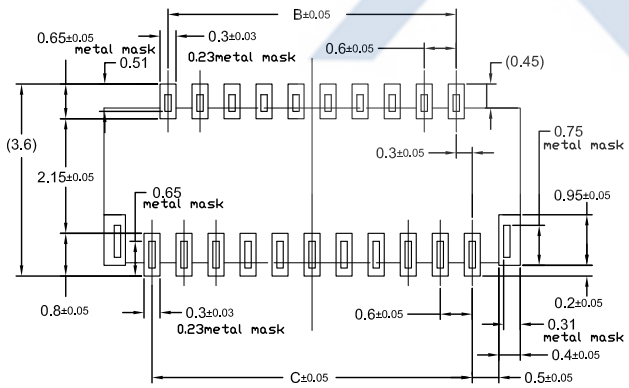

Recommended PCB Layout(Top View)

Recommended metal mask pattern(thickness 0.1mm)

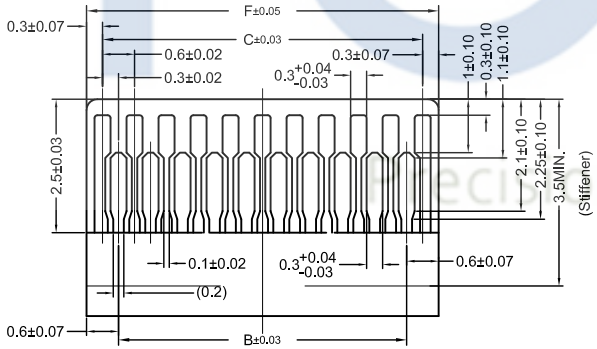

APPLICABLE FPC/FFC
(THICKNESS 0.2±0.03)

KBF302-XX X S R 100 L 2 A

- Pin No.
- 包装方式:
  - T:TUBE（管装）
  - R:REEL（卷装）
  - P：PE（袋装）
- S:SMT
- R:Right Angle
  - V:Vertical
- H厚度：1.0mm=100
  - 1.2mm=120
  - 1.5mm=150
  - 2.0mm=200
- Connacts Type:U:Upper
  - L:Lower
  - R:Right
  - F:Left
  - D:Double
- Mold No.
- Version

No.of Contacts	DIM.					
	A	B	C	D	E	F
09	4.2	1.8	2.4	3.06	3.7	3.0
11	4.8	2.4	3.0	3.66	4.3	3.6
13	5.4	3.0	3.6	4.26	4.9	4.2
15	6.0	3.6	4.2	4.86	5.5	4.8
17	6.6	4.2	4.8	5.46	6.1	5.4
19	7.2	4.8	5.4	6.06	6.7	6.0
21	7.8	5.4	6.0	6.66	7.3	6.6
23	8.4	6.0	6.6	7.26	7.9	7.2
25	9.0	6.6	7.2	7.86	8.5	7.8
27	9.6	7.2	7.8	8.46	9.1	8.4
29	10.2	7.8	8.4	9.06	9.7	9.0
31	10.8	8.4	9.0	9.66	10.3	9.6
33	11.4	9.0	9.6	10.26	10.9	10.2
35	12.0	9.6	10.2	10.86	11.5	10.8
37	12.6	10.2	10.8	11.46	12.1	11.4
39	13.2	10.8	11.4	12.06	12.7	12.0
41	13.8	11.4	12.0	12.66	13.3	12.6
43	14.4	12.0	12.6	13.26	13.9	13.2
45	15.0	12.6	13.2	13.86	14.5	13.8
49	16.2	13.8	14.4	15.06	15.7	15.0
51	16.8	14.4	15.0	15.66	16.3	15.6
57	18.6	16.2	16.8	17.46	18.1	17.4
61	19.8	17.4	18.0	18.66	19.3	18.6
67	21.6	19.2	19.8	20.46	21.1	20.4
71	22.8	20.4	21.0	21.66	22.3	21.6

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2015-04-28	A		KBF302-XXXSR100L2A	John

TOLERANCE 公 差: .X=±0.30, .XX=±0.20, .XXX=±0.10

DRAWING 設計者: John
CHECKED 審查: Thomas
APPROVED 核准: William

KBF302-XXXSR100L2A
PART NO. 料號
DWG NO. 圖號: PE1904008A
UNIT 單位: mm
PRODUCT NAME 產品名稱: 0.3 ZIF FPC SMT R/A B/C

XYCO PRECISION CONNECTORS
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn