

DRAWING FOR CUSTOMER

■SPEC.:

- Rated Voltage: 30V AC,DC
- Rated Current: 0.5A AC,DC
- Withstand Voltage: 200V AC/minute
- Contact Resistance: 20mΩ max
- Insulation Resistance: 100MΩ min
- Temperature Range: -25°C~+85°C

■Material:

- Insulator:C1-LCP UL94V-0
B1-PA66 UL94V-0

KB802-X X H E 6 A -XX

Pin No.





Material

Housing

Version

Ear

Mold No.

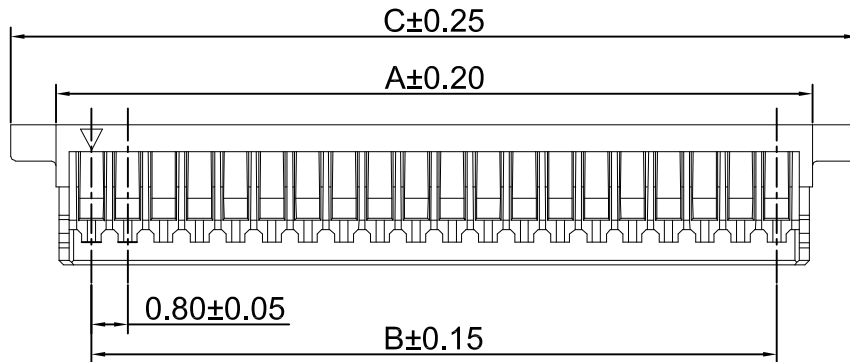

Poles	Dimensions(mm)		
	A	B	C
02	2.40	0.80	4.40
03	3.20	1.60	5.20
04	4.00	2.40	6.00
05	4.80	3.20	6.80
06	5.60	4.00	7.60
08	7.20	5.60	9.20
10	8.80	7.20	10.80
12	10.40	8.80	12.40
14	12.00	10.40	14.00
16	13.60	12.00	15.60
17	14.40	12.80	16.40
20	16.80	15.20	18.80

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

2016-11-25		A	CHANGE HISTORY 變更歷史	KB802-XXHE6A-XX	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB802-XXHE6A-XX		UNIT 單位		PRODUCT NAME 產品名稱	SUH PH0.80mm Wire to Board Housing ear
DATE 日期	VER 版本	CHANGED NAME 修改後料號				DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	mm			
							APPROVED 核准	William	DWG NO. 圖號	PE200704A	⊕			