

DRAWING FOR CUSTOMER

KB951-D XX X D V 3 A

Double row

Pin No.

包装方式:

T:TUBE (管装)

R:REEL (卷装)

P: PE (袋装)

Version

Mold No.

R:Riht Angle

V:Vertical

S:SMT





D:DIP

■SPEC.:

- Rated Voltage: 250V AC,DC
- Rated Current: 3A AC,DC
- Withstand Voltage: 800V AC/minute
- Contact Resistance: 20mΩ max
- Insulation Resistance: 1000MΩ min
- Temperature Range: -25°C~+85°C

■Material :

- Insulator(A): PBT UL94V-0
- Contact Pin(B):Brass
- Finish: Gold-Plated,over Nickel

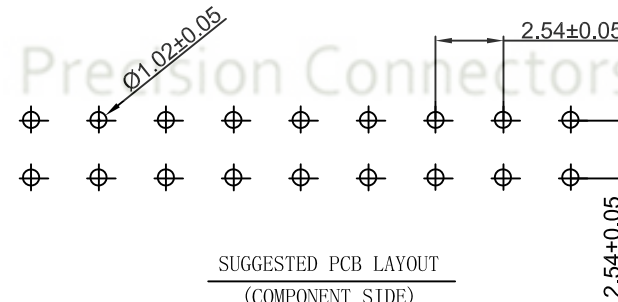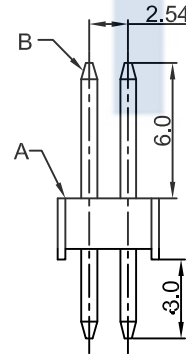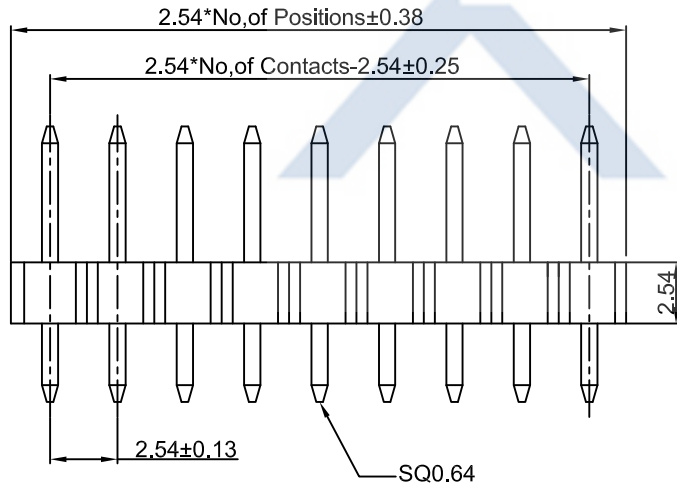

2016-05-16	A		KB951-DXXXDV3A	Devin
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者

TOLERANCE 公差	DRAWING 設計者	Devin
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas
	APPROVED 核准	William

KB951-DXXXDV3A	
PART NO. 料號	
DWG NO. 圖號	PE1807003A

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

UNIT 單位	mm	PRODUCT NAME 產品名稱	DP2.54mm DIP Vertical Double row Wafer
------------	----	----------------------	---